




Hi-TECH 450

Horizontal Turning Center
Box Way, Gear Box, 10"-15" Chuck



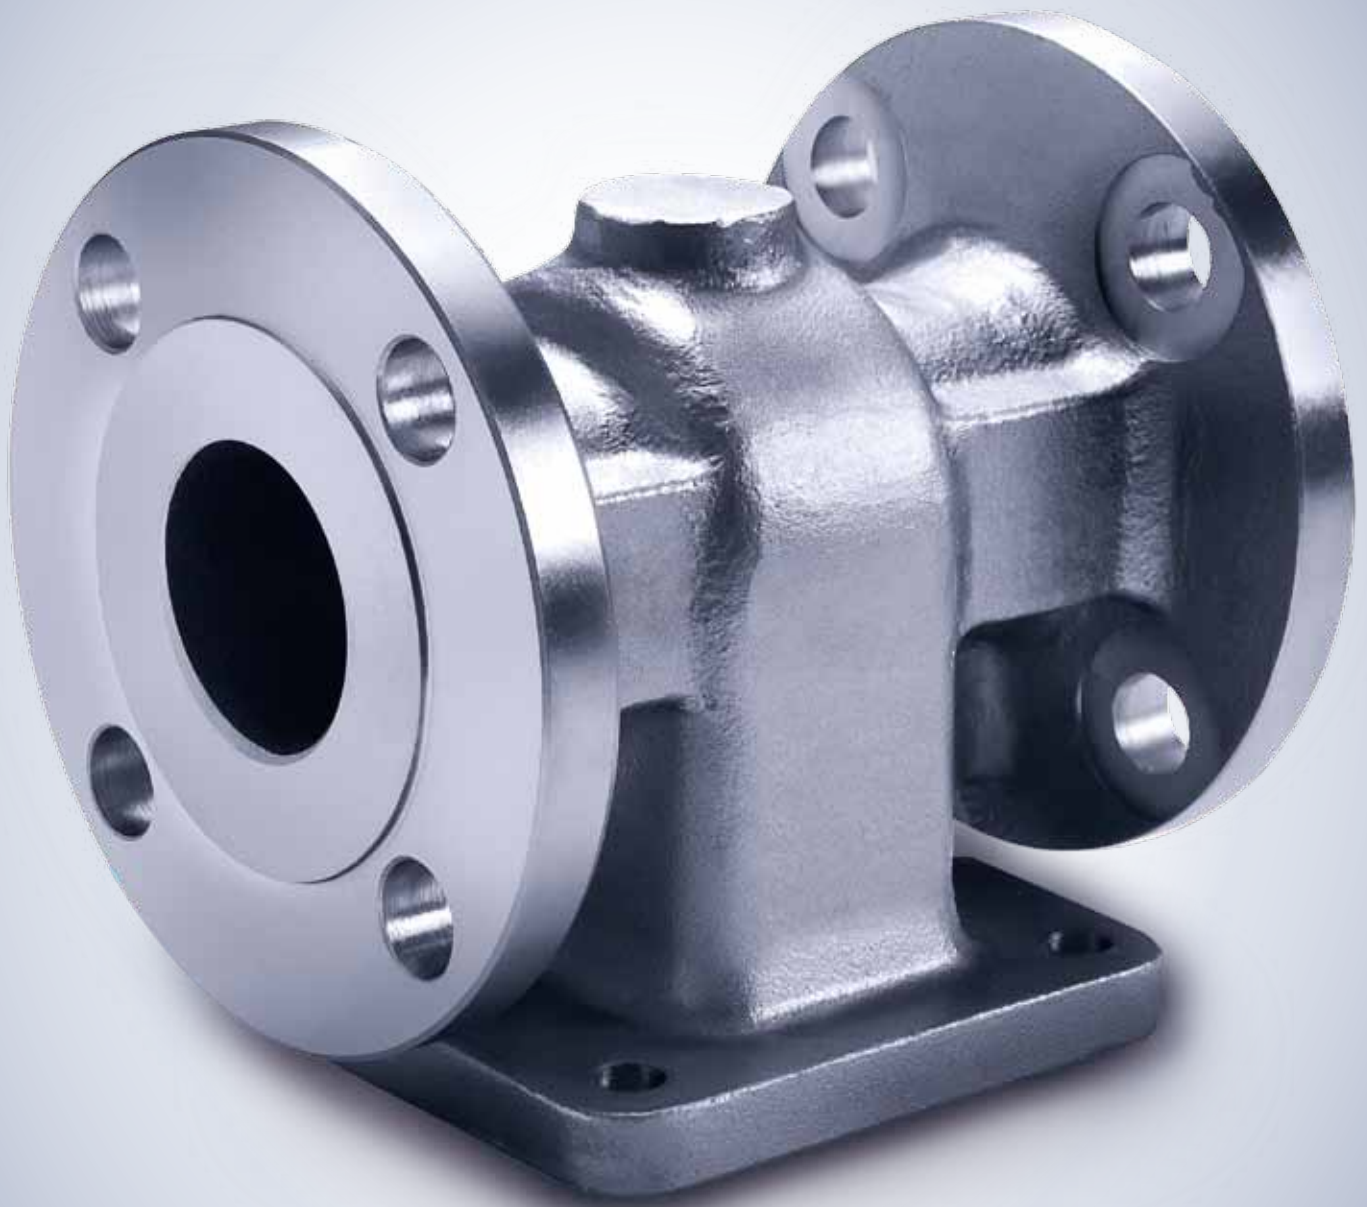

HORIZONTAL TURNING CENTER BOX WAY, GEAR BOX, 10"-15" CHUCK

Box way, Gear Box, 10"-15" Chuck Horizontal Turning Center

From basic to multi axis turning, the Hi-TECH 450 is capable of performing a variety of most complex production processes.


The optional available Y-axis allows even most complex process operations, the gear box for high torque is standard and provides high-speed as well as high-torque machining capability.

1 Valve Body / Plant Industry / CF8M 2 Flange / Automobile / SCM415
3 Cam Shaft / Automobile / Sintered Alloy 4 Valve Body / Plant Industry / SCW410



LARGE TASK COMPACT MACHINE FOOTPRINT


Hi-TECH 450 is the pinnacle of Hwacheon technology. Its small footprint design will provide to you space efficiency, while offering the largest turning diameter as well as turning length among today's mid-size lathes. A variety of options, such as Y-axis, provide higher flexibility. Hi-TECH 450 can be configured to ensure the perfect setup for your production needs and requirements - whether you have to manufacture is a hydraulic valve, connectors, flanges or long shafts.

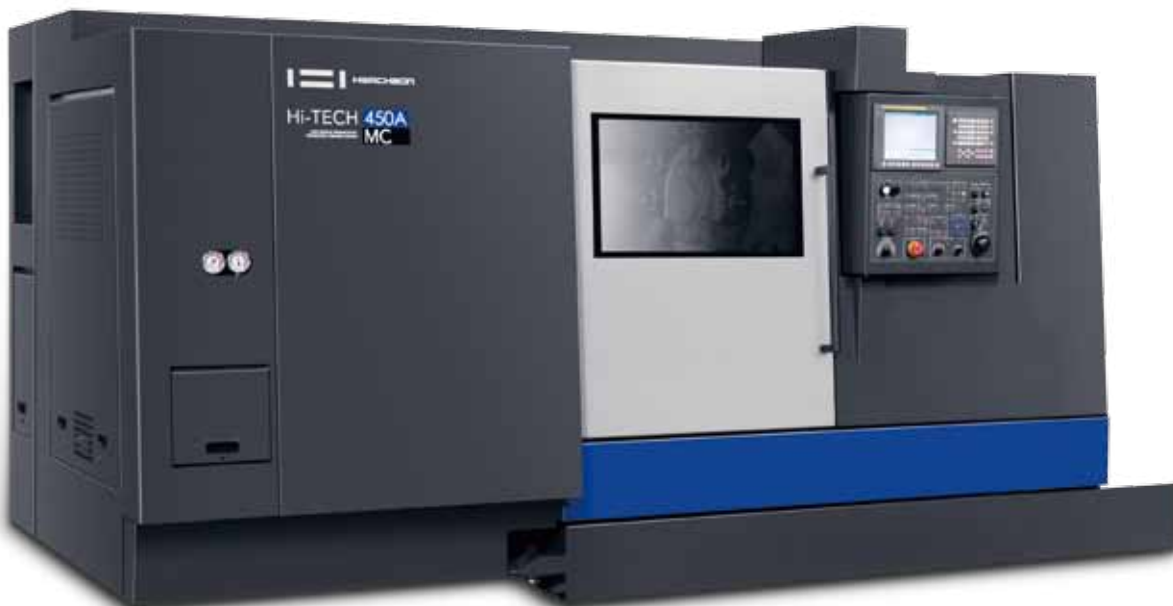



Hand-scraped to perfection

The guide-ways are hand-scraped and polished to the highest precision based on Hwacheon's 60 years craftsmanship experience, this to reduce vibration and allows precision feed during heavy operations.

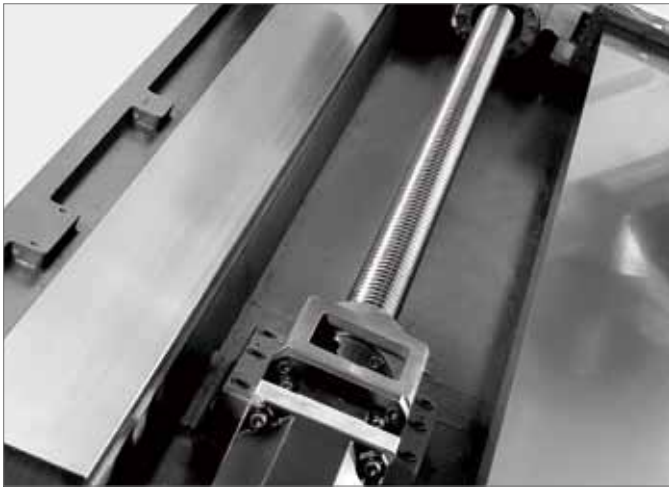


Box way design

All guide way are designed as sturdy box way to maintain durability and highest precision even during prolonged machining operation.


High-speed, high-power spindle


The high output spindle provides stable and precise machining at high speed turning.

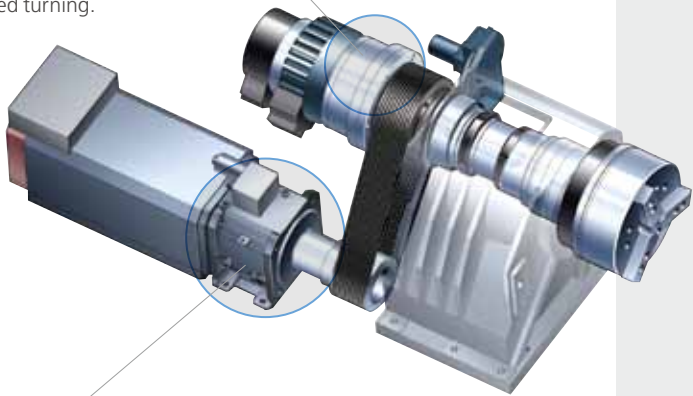

Highly efficient transmission

The standard automatic gear box provides extra strength and power at lower speed while providing fast and efficient cutting at higher speeds. The transmission and the spindle motor are separated to minimize heat and vibration interference, to ensure each operation is as stable & consistent as possible.

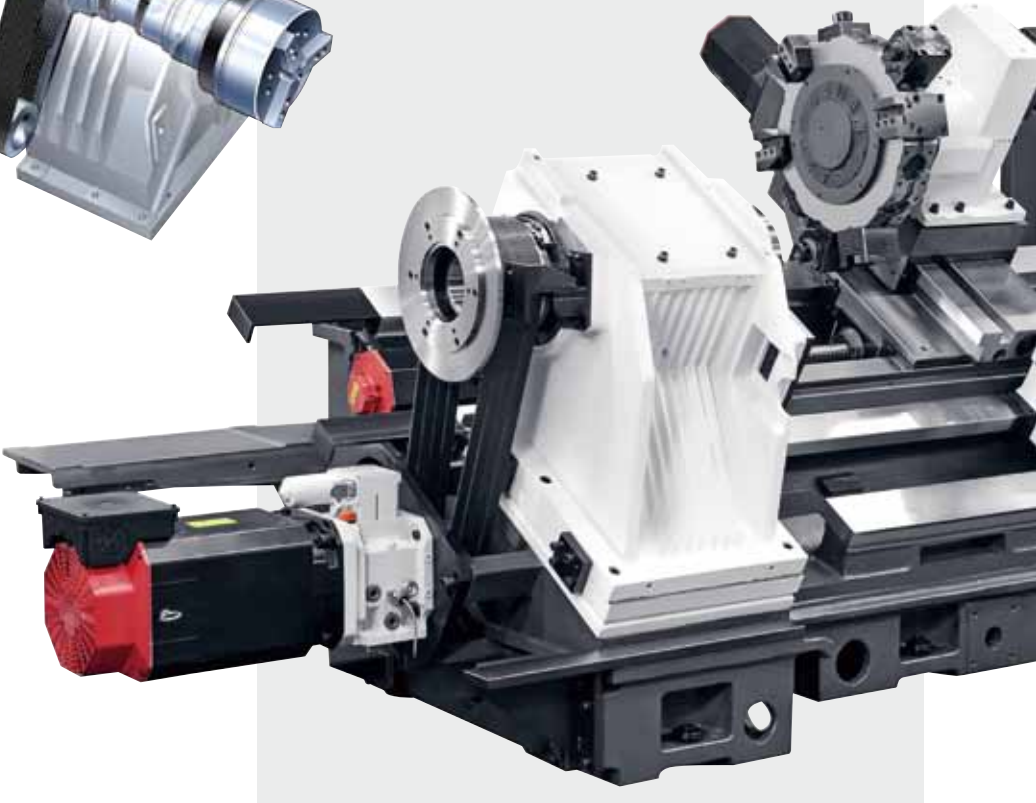

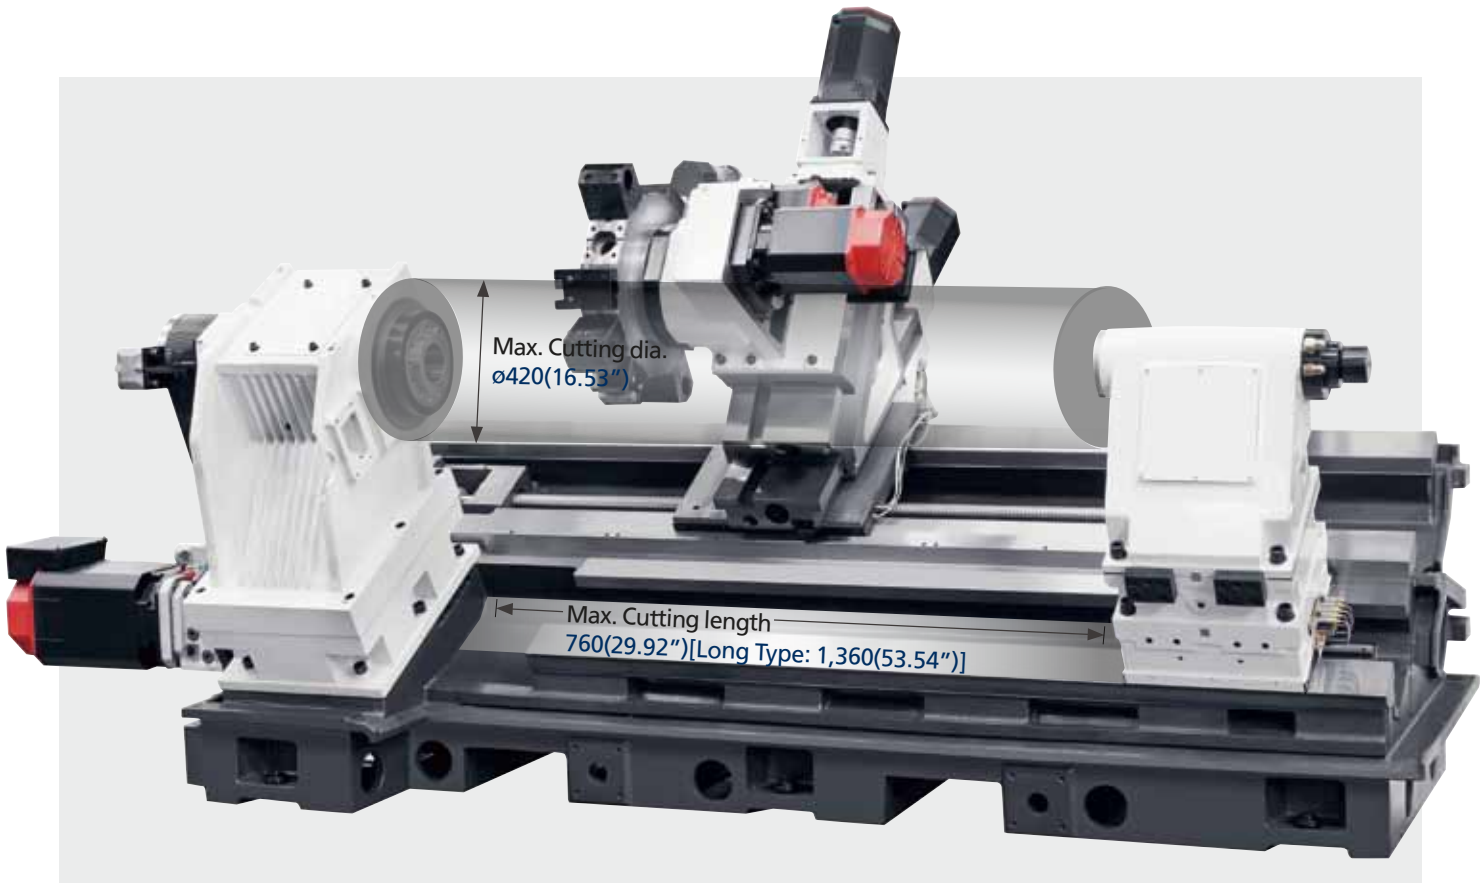


Rigid one piece frame structure

The single-frame bed structure eliminates heat distortion, absorbs vibration, and provides quality surface roughness and highest precision at high speed operations.

Interference free cutting diameter

Hi-TECH 450 ensures, that the work piece does not interfere with any moving part within the turning operation zone, for better trouble free results.

Max. Cutting Dia. : ø420 mm
Max. Cutting Length : 760 mm(L: 1,360mm)

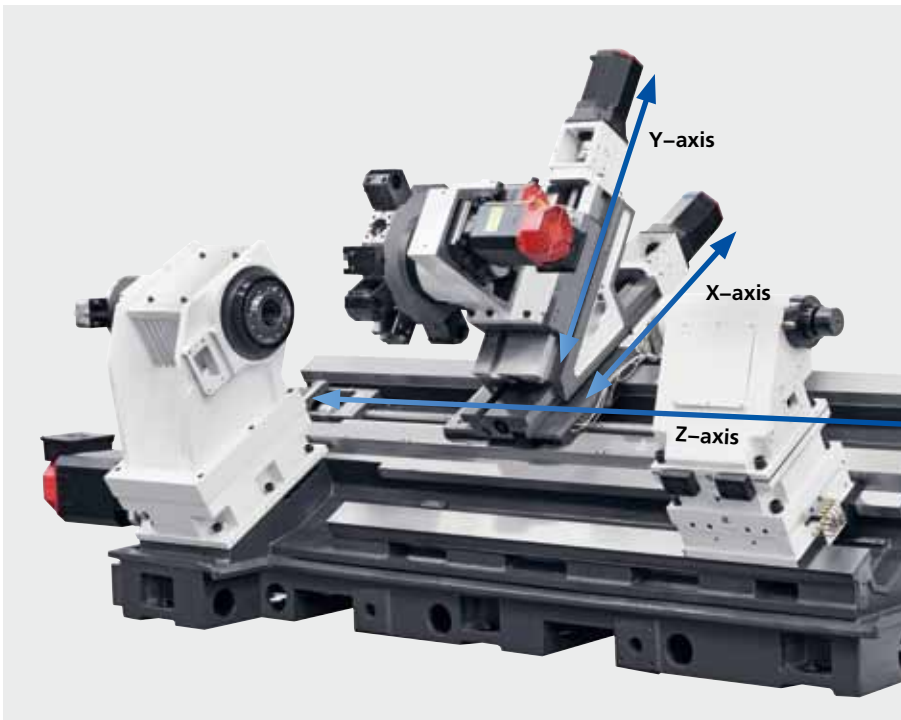

Multi-process milling with Y-axis (YMC)

At customer's request, a Y-axis can be added to achieve complete process operations on even complex work pieces. From turning to milling, with a single setting. This saves not only time but more additional set-ups making your work more efficient it's like having two machines in one.

- Spindle indexing: by 0.001 degrees
- Y-axis stroke: 120(4.72") [±60(±2.36")]



USER FRIENDLY DESIGN, A WIDE RANGE OF OPTIONAL FEATURES

Hi-TECH 450 is designed with the end-user in mind. Its user-friendly design and a variety of supplementary features and options make it powerful, faster and more precise. For highest machining performance.

Any forms and shapes

Control multiple axes simultaneously using the turn-mill function and the C-axis spindle.



Sub spindle (Option)

With the addition of the sub spindle, the main and the sub spindles work in sync to complete the first and second operation of your process, to ensure your work is highly productive.

L-HTLD: Hwacheon Lathe Tool Load Detect System (Option)



The Hwacheon Lathe Tool Load Detect System constantly detects and diagnoses the tool load under a process to prevent tool wear and damage, and to keep your machine and tools in optimal shape.

Load Detection Limit 1	Load Detection Limit 2
Alarm + Feed Hold	Alarm + Machine Stop
> When the LIMIT 1 Alarm sounds, the system holds the feed and the machine goes into standby.	> When the LIMIT 2 Alarm sounds, the system stops the machine, and must be reset to operate it.

A Distance between operator and the center of spindle: 450mm(17.71")


B From the floor surface to the spindle center: 1,010 mm(39.76")
*Y-Axis: Official Verification Required

Eco-friendly complete oil-and-coolant separation design

The distance between the operator and the center of the spindle is kept short at the Hi-TECH 450, to ensure loading and unloading are made easy. For an environment-friendly operation, the Z-axis has a complete oil-and-coolant separation design.


Product Data

* Unit: mm(inch)

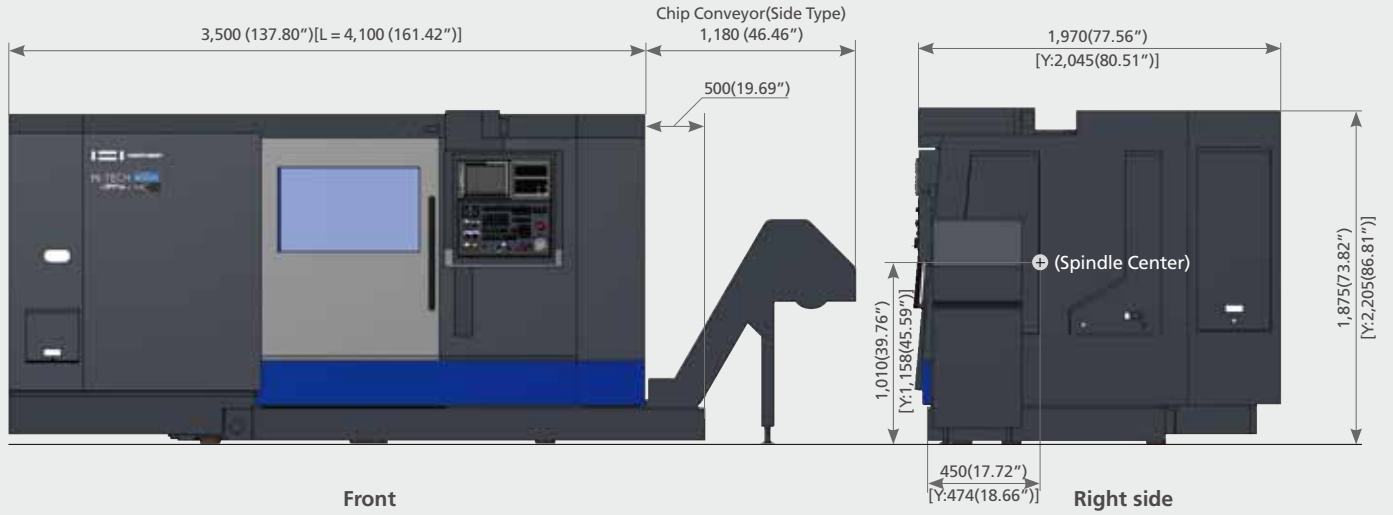


Spindle Power-Torque Diagram

Main spindle (Standard)

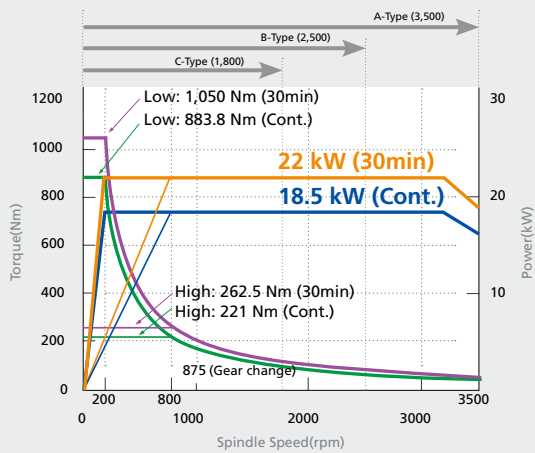


Turnmill (Option)

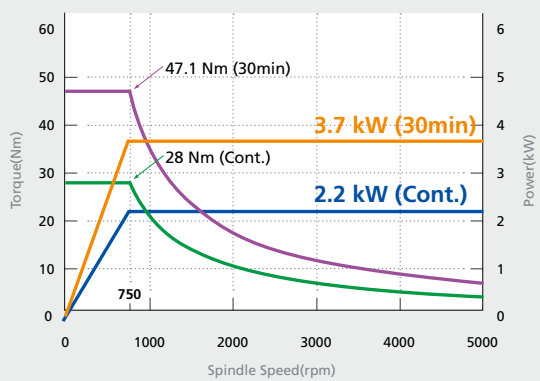


Tool Interference Diagram

※ Unit : mm(inch)


Hi-TECH 450A/B (Standard)

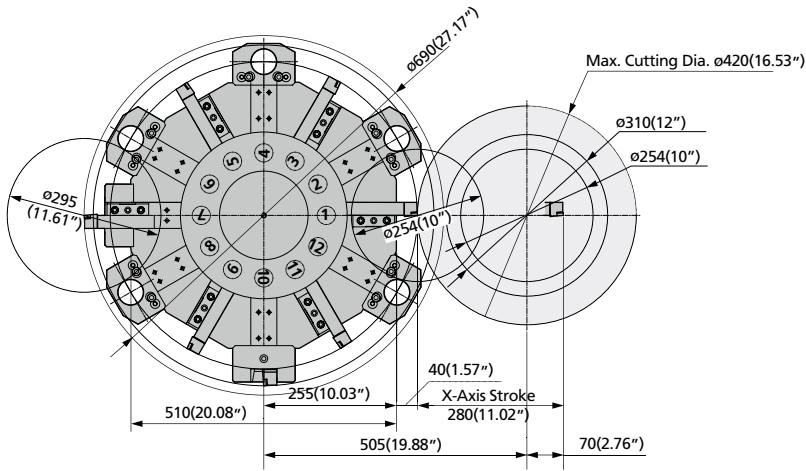


Hi-TECH 450C (Standard)

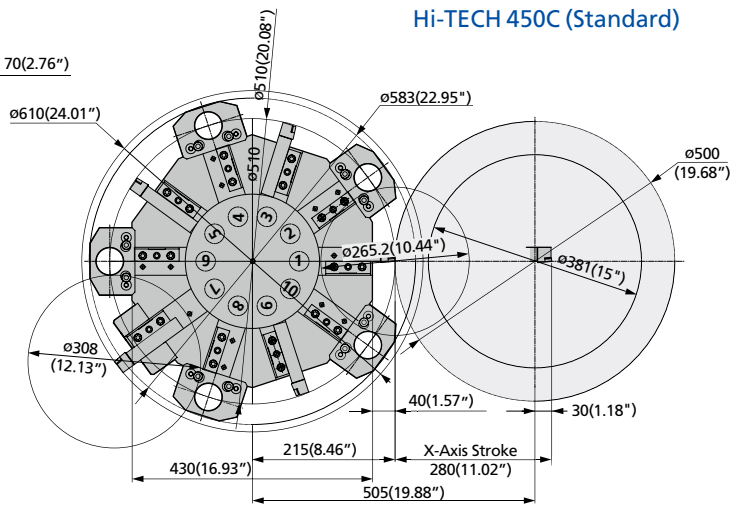

Hi-TECH 450A/B/C (MC)

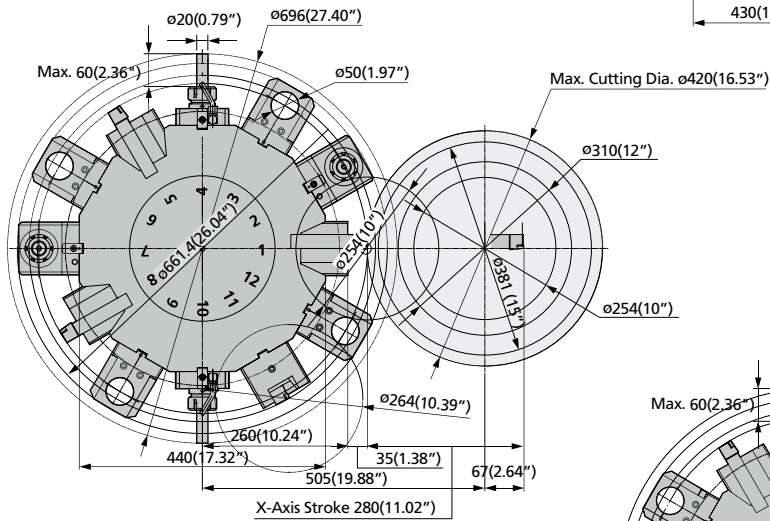


Y-AXIS Moving Range

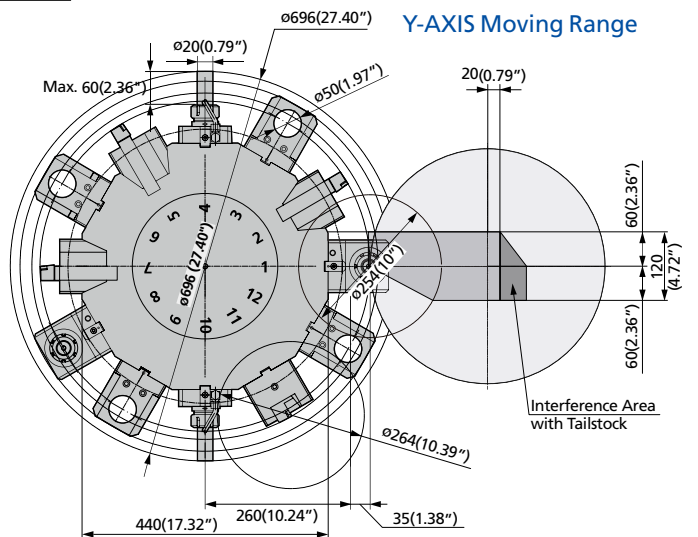

Product Configuration

Each product can be configured to fit your application.

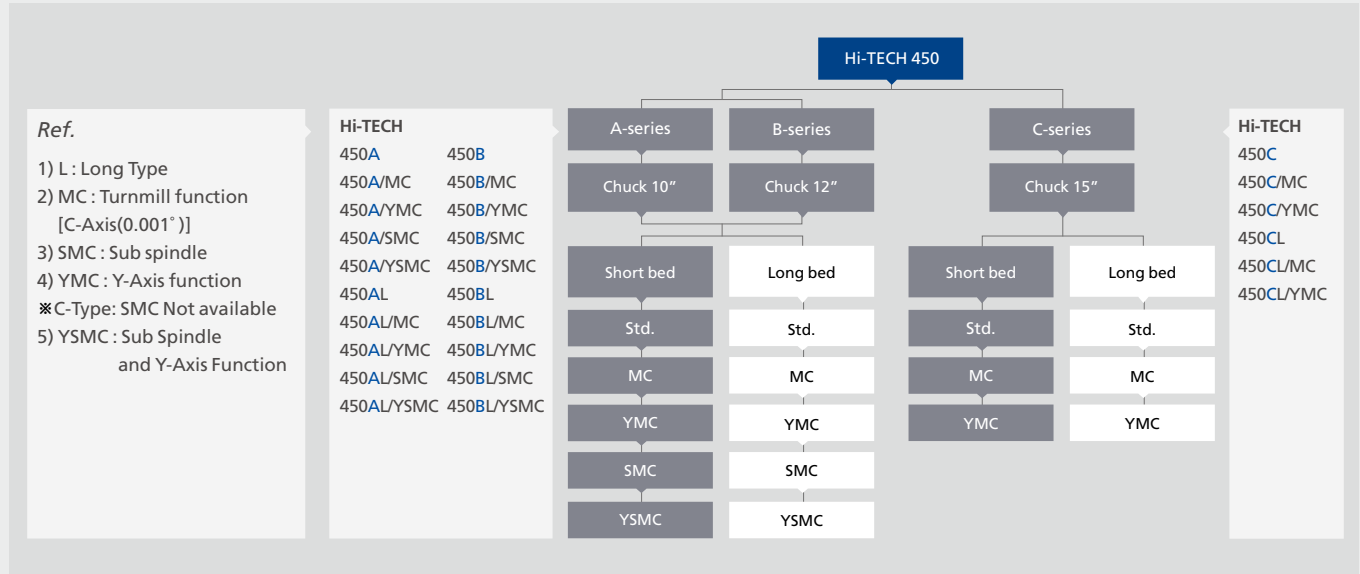

Machine Specifications

ITEM	Hi-TECH 450 SERIES					
	450A[YSMC]	450B[YSMC]	450C[YMC]	450AL[YSMC]	450BL[YSMC]	450CL[YMC]
Capacity						
Swing over bed	mm (inch) Ø700 (27.56")					
Swing over Saddle	mm (inch) Ø550 (21.65")					
Max. Cutting diameter	mm (inch) Ø420 (16.54")		mm (inch) Ø500 (19.69") [MC Ø420 (16.54")]		mm (inch) Ø420 (16.54") Ø500 (19.69") [MC Ø420 (16.54")]	
Standard cutting diameter	mm (inch) Ø295 (11.61") [MC : Ø254 (10")]		mm (inch) Ø308 (12.33") [MC : Ø254 (10")]		mm (inch) Ø295 (11.61") Ø308 (12.33") [MC : Ø254 (10")]	
Max. Turning length	mm (inch) 760 (29.92") [MC : 637 (25.08")]	mm (inch) 737 (29.02") [MC : 614 (24.17")]	mm (inch) 673 (26.49") [MC : 550 (21.65")]		mm (inch) 1,360 (53.54") [MC : 1,237 (48.7")]	mm (inch) 1,327 (52.63") [MC : 1,204 (47.8")]
Chuck size	inch 10 (sub : 8")		inch 15"		inch 12 (sub : 8")	
Spindle						
Type of spindle nose	ASA A2 - 8 (sub : A2 - 6)		ASA A2 - 11		ASA A2 - 8 (sub : A2 - 6)	
Max. spindle speed	rpm 3,500 (sub : 4,000)		rpm 1,800		rpm 2,500 (sub : 4,000)	
Through spindle hole diameter	mm (inch) Ø90 (3.54") [sub : Ø75 (2.95")]		mm (inch) Ø105 (4.13") Ø132 (5.20")		mm (inch) Ø105 (4.13") [sub : Ø62 (2.44")]	
Max. Bar size	mm (inch) Ø76 (2.99") [sub Ø46 (1.81")]		mm (inch) Ø89 (3.50") Ø116 (4.57")		mm (inch) Ø89 (3.50") [sub Ø51 (2.00")]	
Spindle bearing inner diameter	mm (inch) Ø140 (5.51") [sub:Ø100 (3.94)]		mm (inch) Ø160 (6.30") Ø180(7.09)		mm (inch) Ø160 (6.30") [sub:Ø100 (3.94)]	
Spindle motor (30min/cont)	kW 22 / 18.5 (Sub : 7.5 / 5.5)		kW 22 / 18.5		kW 22 / 18.5 (Sub : 7.5 / 5.5)	
Turret						
Number of tool station	ea 12		ea 10 (MC : 12)		ea 12	
Tool size (OD x ID)	mm (inch) □25 x Ø50 (□1" x Ø1.97")					
Turret indexing time	sec/step 0.25					
Travel						
Rapid speed (X / Z / Y / B)	m/min (ipm) 20 / 24 / 10 / 16 (787.4 / 944.8 / 393.7 / 629.92)		m/min (ipm) 20 / 24 / 10 / - (787.4 / 944.8 / 393.7 / -)		m/min (ipm) 20 / 24 / 10 / 16 (787.4 / 944.8 / 393.7 / 629.92)	
Max. Stroke (X / Z / Y / B)	mm (inch) 280 / 790 / 120 (±60) / 750 (11.02 / 31.1 / 4.72 / 29.53)		mm (inch) 280 / 790 / 120 (±60) / - (11.02 / 31.1 / 4.72 / -)		mm (inch) 280 / 1,390 / 120 (±60) / 1,350 (11.02 / 54.72 / 4.72 / 53.15)	
Feed Motor (X / Z / Y / B)	kW 4.0 / 4.0 / 4.0 / 1.6		kW 4.0 / 4.0 / 4.0 / -		kW 4.0 / 4.0 / 4.0 / 1.6	
Tailstock						
Tailstock travel	mm (inch) 750 (29.53")			mm (inch) 1,350 (53.15")		
Quill dia.	mm (inch) Ø100 (3.94")					
Taper hole	mm (inch) MT # 5 (Live Center)					
Quill Stroke	mm (inch) 120 (4.72")					
Turnmill						
Rotary tool spindle motor	kW 3.7 / 2.2					
Max. Rotary tool speed	rpm 5,000					
Max. Drill / Tap size	mm (inch) Ø20 (0.79") x M16					
Min. Spindle indexing angle	°(deg) 0.001° (sub : 0.001°)					
Tank Capacity						
Lubrication	ℓ (gal) 12(3.17)					
Hydraulic	ℓ (gal) 50(13)					
Coolant	ℓ (gal) 190 (50.2)			ℓ (gal) 240 (63.4)		
Power Source						
Electrical power supply	kVA STD, MC, YMC: 50 / SMC, YSMC: 55					
Dimension						
Height	mm (inch) 1,875(Y:2,205) [73.82"(Y:86.81")]					
Floor space (L x W)	mm (inch) 3,500 x 1,970(Y: 2,045)[137.80" x 77.56"(Y: 80.51")]			mm (inch) 4,100 x 1,970(Y: 2,045)[161.42" x 77.56"(Y: 80.51")]		
Weight	kg STD: 5,500 MC: 6,000 (YMC: 6,500 YSMC: 7,500)			kg STD 6,800 MC 7,300 (YMC 7,800 YSMC 8,800)		
NC Controller						
Fanuc 0i-TD						

Standard and Optional product components

Standard Accessories		Optional Accessories	
• Door interlock	• Tailstock (MT#5)	• Air gun	• NC Cooler
• Foot switch	- Tailstock body program	• Air blower	• Parts catcher (A,B type)
• High pressure coolant pump 6bar	- Tailstock quill program	• Auto door	• Signal lamp with 3 colors (R, G, Y)
• Hydraulic chuck & cylinder (A: 10", B: 12", C: 15")	• Tool kit & box	• Bar feeder interface	• Steady rest base
• Hydraulic unit 40 kg/cm ²	• Tooling system	• Chip conveyor & box (Side type)	• Tool & work counter, External / Internal
• Leveling bolt & plate	• Turret	• Chuck dual pressure system	• Tool presetter (Automatic)
• Lubrication unit	• Work light	• Chuck pressure check switch	• Tool life management
• Manual guide i	• 10.4" LCD monitor	• Chuck pressure compensation	• Transformer
• Manual & parts list		• Coolant gun	• Turnmill function including C-axis (0.001°)
• Signal lamp with 2 colors (R, G)		• Function of Y-axis (±60mm)	• Turnmill holder (Axial / Radial)
• Set of soft jaws		• Hard jaw	• U-Drill holder
		• High pressure coolant pump 15 bar	
		• L-HTLD (Lathe-Hwacheon Tool Load Detect)	
		• Linear scale (X, Z-axis)	




NC Specifications [Fanuc0i-TD]

※ - : Not available S : Standard O : Option

ITEM	SPECIFICATION	STD	MC	SMC	YSMC
Controlled axis					
Controlled axis (Cs axis)	2-Axes	2-Axes	3-Axes	5-Axes	5-Axes
Simultaneously controlled axes	2-Axes	2-Axes	3-Axes	4-Axes	4-Axes
Least input increment	0.001 mm, 0.001 deg, 0.0001 inch	S	S	S	S
Least input increment 1/10	0.0001 mm, 0.0001 deg, 0.00001 inch	O	O	O	O
inch/metric conversion	G20, G21	S	S	S	S
Stored stroke check 1, 2, 3		S	S	S	S
Chamfering on / off		S	S	S	S
Backlash compensation		S	S	S	S
Operation					
Automatic & MDI operation		S	S	S	S
Program number search		S	S	S	S
Sequence number search		S	S	S	S
Dry run, single block		S	S	S	S
Manual handle feed	1Unit	S	S	S	S
Manual handle feed rate	x1, x10, x100	S	S	S	S
Interpolation function					
Positioning	G00	S	S	S	S
Linear interpolation	G01	S	S	S	S
Circular interpolation	G02, G03	S	S	S	S
Dwell (Per seconds)	G04	S	S	S	S
Polar coordinate interpolation	G12.1 / G13.1	-	S	S	S
Cylindrical interpolation	G7.1	-	S	S	S
Threading / Multiple threading	G32 / -	S	S	S	S
Threading retract / Continuous threading		S	S	S	S
Continuous threading		S	S	S	S
Variable lead threading	G34	S	S	S	S
Reference position return 1st	G28	S	S	S	S
Reference position return check	G27	S	S	S	S
2,3,4th reference position return	G30	S	S	S	S
Feed function					
Rapid traverse override	F0, F25, F50, F100	S	S	S	S
Feed per minute (mm/min)	G98	S	S	S	S
Feed per revolution (mm/rev)	G99	S	S	S	S
Rapid traverse bell-shaped acceleration / Deceleration		S	S	S	S
Feedrate override	0-150 13 %	S	S	S	S
Jog feed override	0-1,260 mm/min	S	S	S	S
Tool function / Compensation					
Tool function	T4-digits	S	S	S	S
Tool offset pairs	64 pairs	S	S	S	S
Tool nose radius compensation		S	S	S	S
Tool geometry / Wear compensation		S	S	S	S
Tool life management		O	O	O	O
Automatic tool offset	Tool presetter option is required	O	O	O	O
Direct input tool offset value measured B	Tool presetter option is required	O	O	O	O
Others					
Display unit	10.4" Color LCD	S	S	S	S

ITEM	SPECIFICATION	STD	MC	SMC	YSMC
Program input					
Tape code	EIA RS244 / ISO840	S	S	S	S
Optional block skip	1 ea	S	S	S	S
Program number	O4-Digits	S	S	S	S
Sequence number	N5-Digits	S	S	S	S
Decimal point programming		S	S	S	S
Coordinate system setting	G50	S	S	S	S
Coordinate system shift		S	S	S	S
Workpiece coordinate system	G54-G59	S	S	S	S
Workpiece coordinate system preset	G92.1	S	S	S	S
Direct drawing dimension programming		S	S	S	S
G code system	A	S	S	S	S
Programmable data input	G10	S	S	S	S
Sub program call	10 folds nested	S	S	S	S
Custom macro B / Canned cycles		S	S	S	S
Addition of custom macro -common variables	#100-#199, #500-#999	S	S	S	S
Multiple repetitive cycle		S	S	S	S
Multiple repetitive cycle II		S	S	S	S
Canned cycles for drilling		S	S	S	S
Small-hole peck drilling cycle		S	S	S	S
Manual guide i		S	S	S	S
Spindle speed function					
Constant surface speed control	G96 / G97	S	S	S	S
Spindle override	50-120 %	S	S	S	S
Spindle orientation		S	S	S	S
Rigid tapping		O	S	S	S
Spindle synchronous control		-	-	S	S
Editing operation					
Part program storage length	1,280m (512 kB)	S	S	S	S
Number of register able programs	400 ea	S	S	S	S
Background editing		S	S	S	S
Extended part program editing		S	S	S	S
Play back		S	S	S	S
Operation / Display					
Clock function		S	S	S	S
Self-diagnosis function / Alarm history display		S	S	S	S
Help function / Graphic function		S	S	S	S
Run hour and parts count display		S	S	S	S
Graphic function		S	S	S	S
Multi-language display	Korean, English, German, French, Italian, Chinese, Spanish, Portuguese, Polish, Hungarian, Swedish, Russian	S	S	S	S
Data input / Output					
Reader / Puncher interface CH1	RS232C	S	S	S	S
Reader / Puncher interface CH2	RS232C	S	S	S	S
Ethernet interface		S	S	S	S
Memory card interface		S	S	S	S

Hwacheon Global Network

 Hwacheon Headquarter  Hwacheon America  Hwacheon Europe  Hwacheon Asia



HWACHEON

Please call us for product inquiries.

www.hwacheon.com

The product design and specifications may change without prior notice.
Read the operation manual carefully and thoroughly before operating the product,
and always follow the safety instructions and warnings labels attached on the surfaces of the machines.

HEAD OFFICE

HWACHEON MACHINE TOOL CO., LTD

976-1, JANGDEOK-DONG GWANGSAN-GU, GWANGJU, KOREA
TEL: +82-62-951-5111 FAX: +82-62-951-0086

SEOUL OFFICE

1022-7, BANGBAE-DONG, SEOCHO, SEOUL, KOREA
TEL: +82-2-523-7766 FAX: +82-2-523-2867

USA

HWACHEON MACHINERY AMERICA, INC.

50, LAKEVIEW PARKWAY VERNON HILLS, IL60061, USA
TEL: +1-847-573-0100 FAX: +1-847-573-9900

SINGAPORE

HWACHEON ASIA PACIFIC PTE. LTD.

21 BUKIT BATOK CRESCENT, #08-79 WCEGA TOWER SINGAPORE 658065
TEL: +65-6515-4357 FAX: +65-6515-4358

GERMANY

HWACHEON MACHINERY EUROPE GMBH

JOSEF-BAUMANN STR. 25, 44805, BOCHUM, GERMANY
TEL: +49-2349-128160 FAX: +49-2349-128166